

2400 West College Drive  
P.O. Box 1007  
Cheyenne, Wyoming 82003

(307) 632-8971  
Fax (307) 632-8972  
E-mail: [www.reimancorp.com](http://www.reimancorp.com)

Re: **Town of Saratoga Sheet Piling**

August 19, 2011

Gentlemen,

We propose to furnish all plant, labor, materials and taxes to complete the following work on the above referenced project in accordance with the Plans, Specifications and Special Provisions.

ITEM #	DESCRIPTION	QUANT	UNITS	UNIT PRICE	EXTENDED TOTAL
1.00000	Mobilization	1.00	LS	\$ 24,600.00	\$24,600.00
2.00000	Sheet Piling	5955.00	SF	\$ 27.65	\$164,655.75
<b>TOTAL BID</b>					<b>\$189,255.75</b>

**Excludes Sheet Piling Cap**

**Excludes overhead and underground clearances, dewatering, storm water control.**

**Excludes All Removals, excavation, backfill.**



Quote is based on using a vibratory hammer to drive sheet piling. If a pile driver is required to reach depth additional compensation will be required

We exclude traffic control, flagging and railroad insurance, testing, QA/QC.

We appreciate the opportunity of quoting and hope we both may be favored with a contract. Thank you.

Sincerely,

Scott Reiman  
Reiman Corp.



2400 West College Drive  
P.O. Box 1007  
Cheyenne, Wyoming 82003



(307) 832-8971  
Fax (307) 832-8972  
E-mail: www.reimancorp.com

Re: Town of Saratoga Sheet Piling w/ Concrete Barrier

August 25, 2011

Gentlemen,

We propose to furnish all plant, labor, materials and taxes to complete the following work on the above referenced project in accordance with the Plans, Specifications and Special Provisions.

ITEM #	DESCRIPTION	QUANT	UNITS	UNIT PRICE	EXTENDED TOTAL
1.00000	Mobilization	1.00	LS	\$ 13,800.00	\$13,800.00
2.00000	Sheet Piling	1690.00	SF	\$ 25.15	\$42,503.50
3.00000	Concrete Barrier	240	LF	\$99.50	\$23,880.00
<b>SUBTOTAL</b>					<b>\$64,598.50</b>
4.00000	CRANE MOBILIZATION	1	LS	\$10,100.00	\$10,100.00
<b>TOTAL BID</b>					<b>\$74,698.50</b>
5.00000	SHEET PILING CUT OFF			\$15.40	

Excludes Sheet Piling Cap

Excludes overhead and underground clearances, dewatering, storm water control.

Excludes All Removals, excavation, backfill.

Mobilization Includes mobilization of Excavator and Hoe Pack to Drive Sheet Piling.

Quote is base on using Reiman Corp. in stock 26' sheet piling.

If Sheet Piling will not Drive With Excavator and Hoe Pack a Crane will be mobilized to attempt driving sheet piling.

If Sheet Piling meets refusal before the designed depth with Crane and Vibratory Hammer sheet piling will be cut off and

Sheet Piling Cut Off will be charged at \$15.40 / SF.

Reiman Corp. will drive 28' Sheet Piling and based on the final driven depth we will give suggestions on the final elevation of the alley

Reiman Corp. will not be responsible for the final elevation of the earth work in the alley.


All Sheet Piling Cut off will be charged at \$15.40 with exception to the first foot.

Quote is based on using a vibratory hammer to drive sheet piling. If a pile driver is required to reach depth additional compensation will be required

We exclude traffic control, flagging and railroad insurance, testing, QA/QC.

We appreciate the opportunity of quoting and hope we both may be favored with a contract. Thank you.

Sincerely,


  
Scott Reiman  
Reiman Corp.




SHEET PILING & STEVIENS

KAS

11-1-11

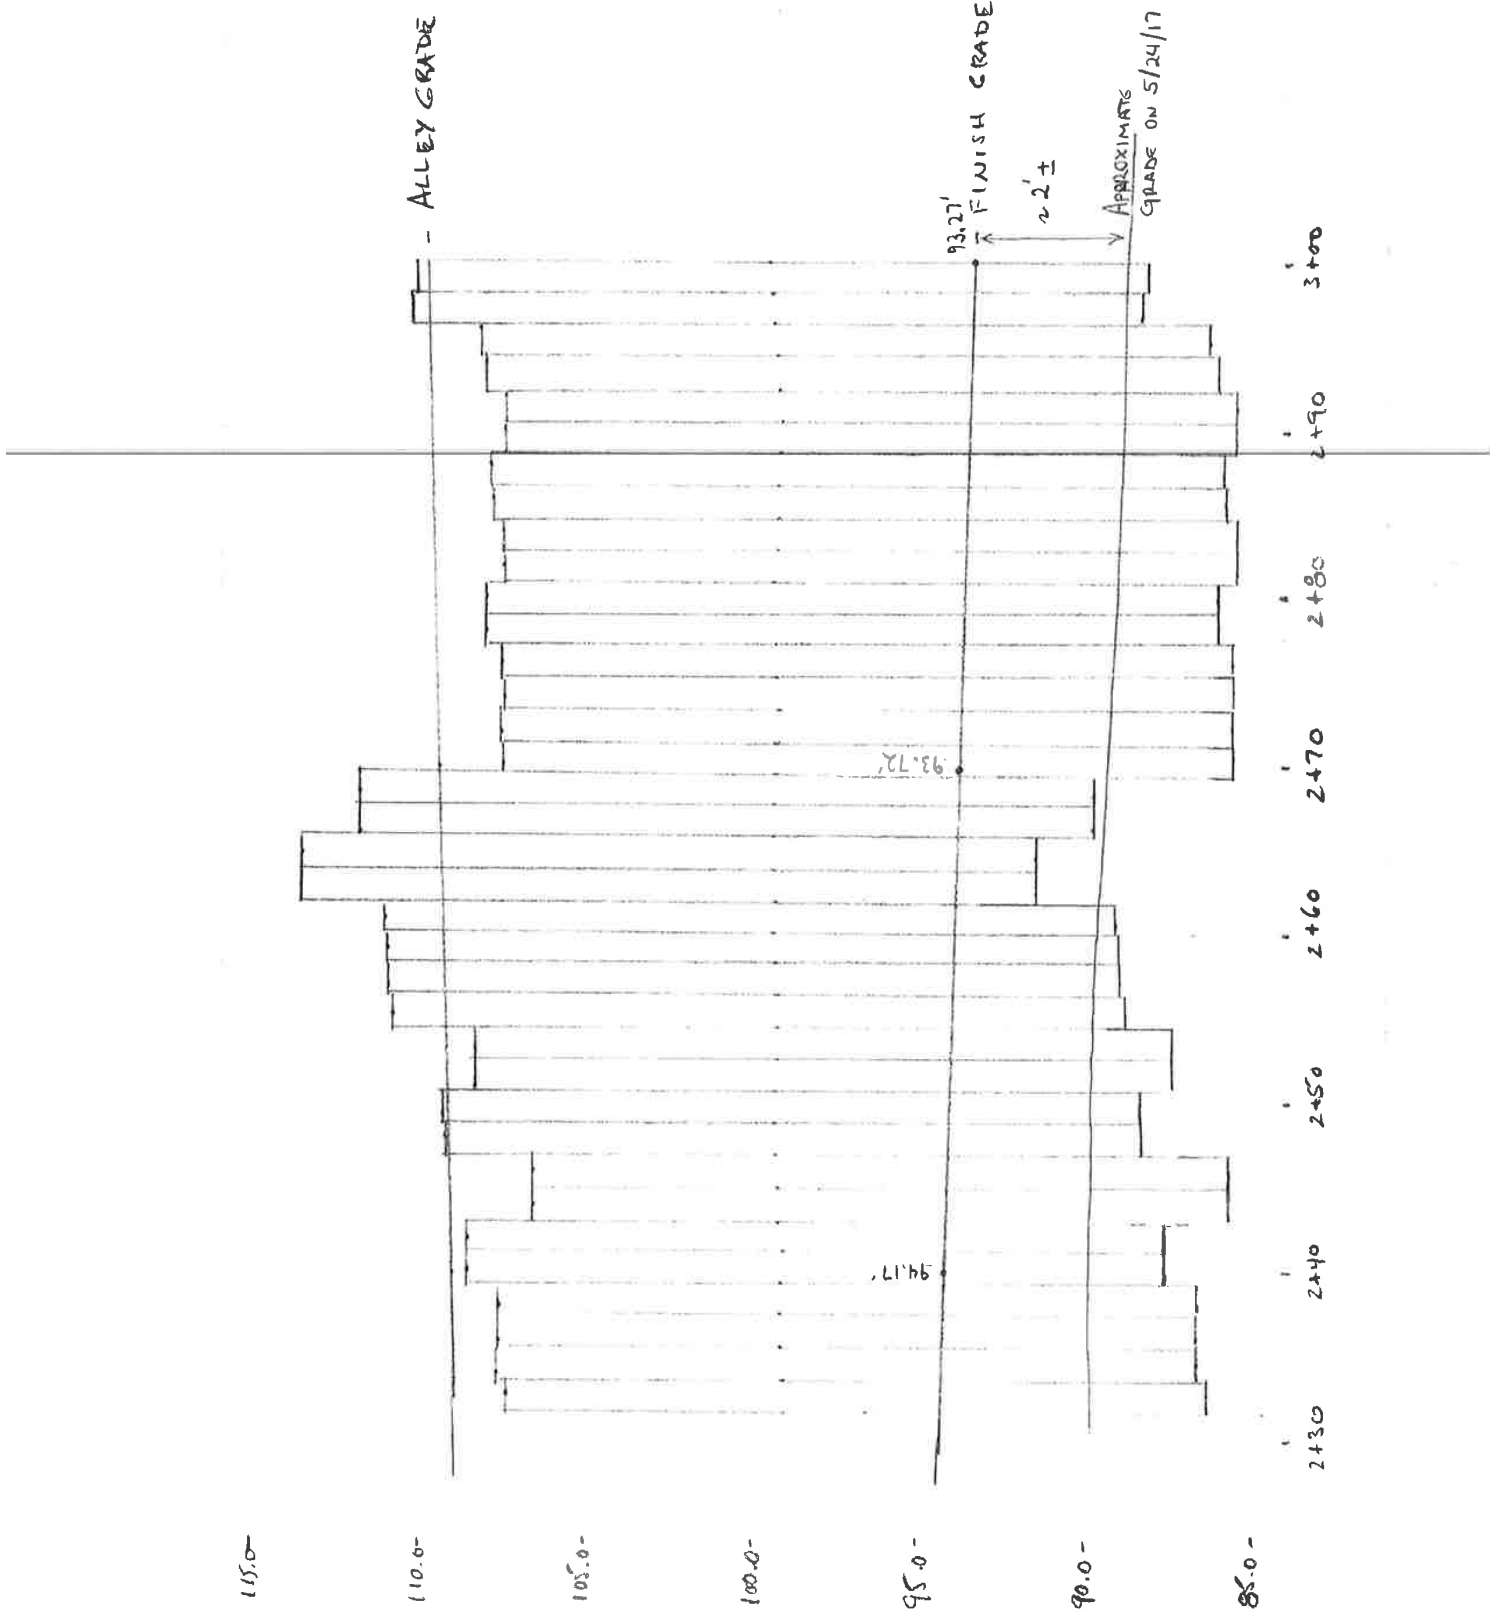

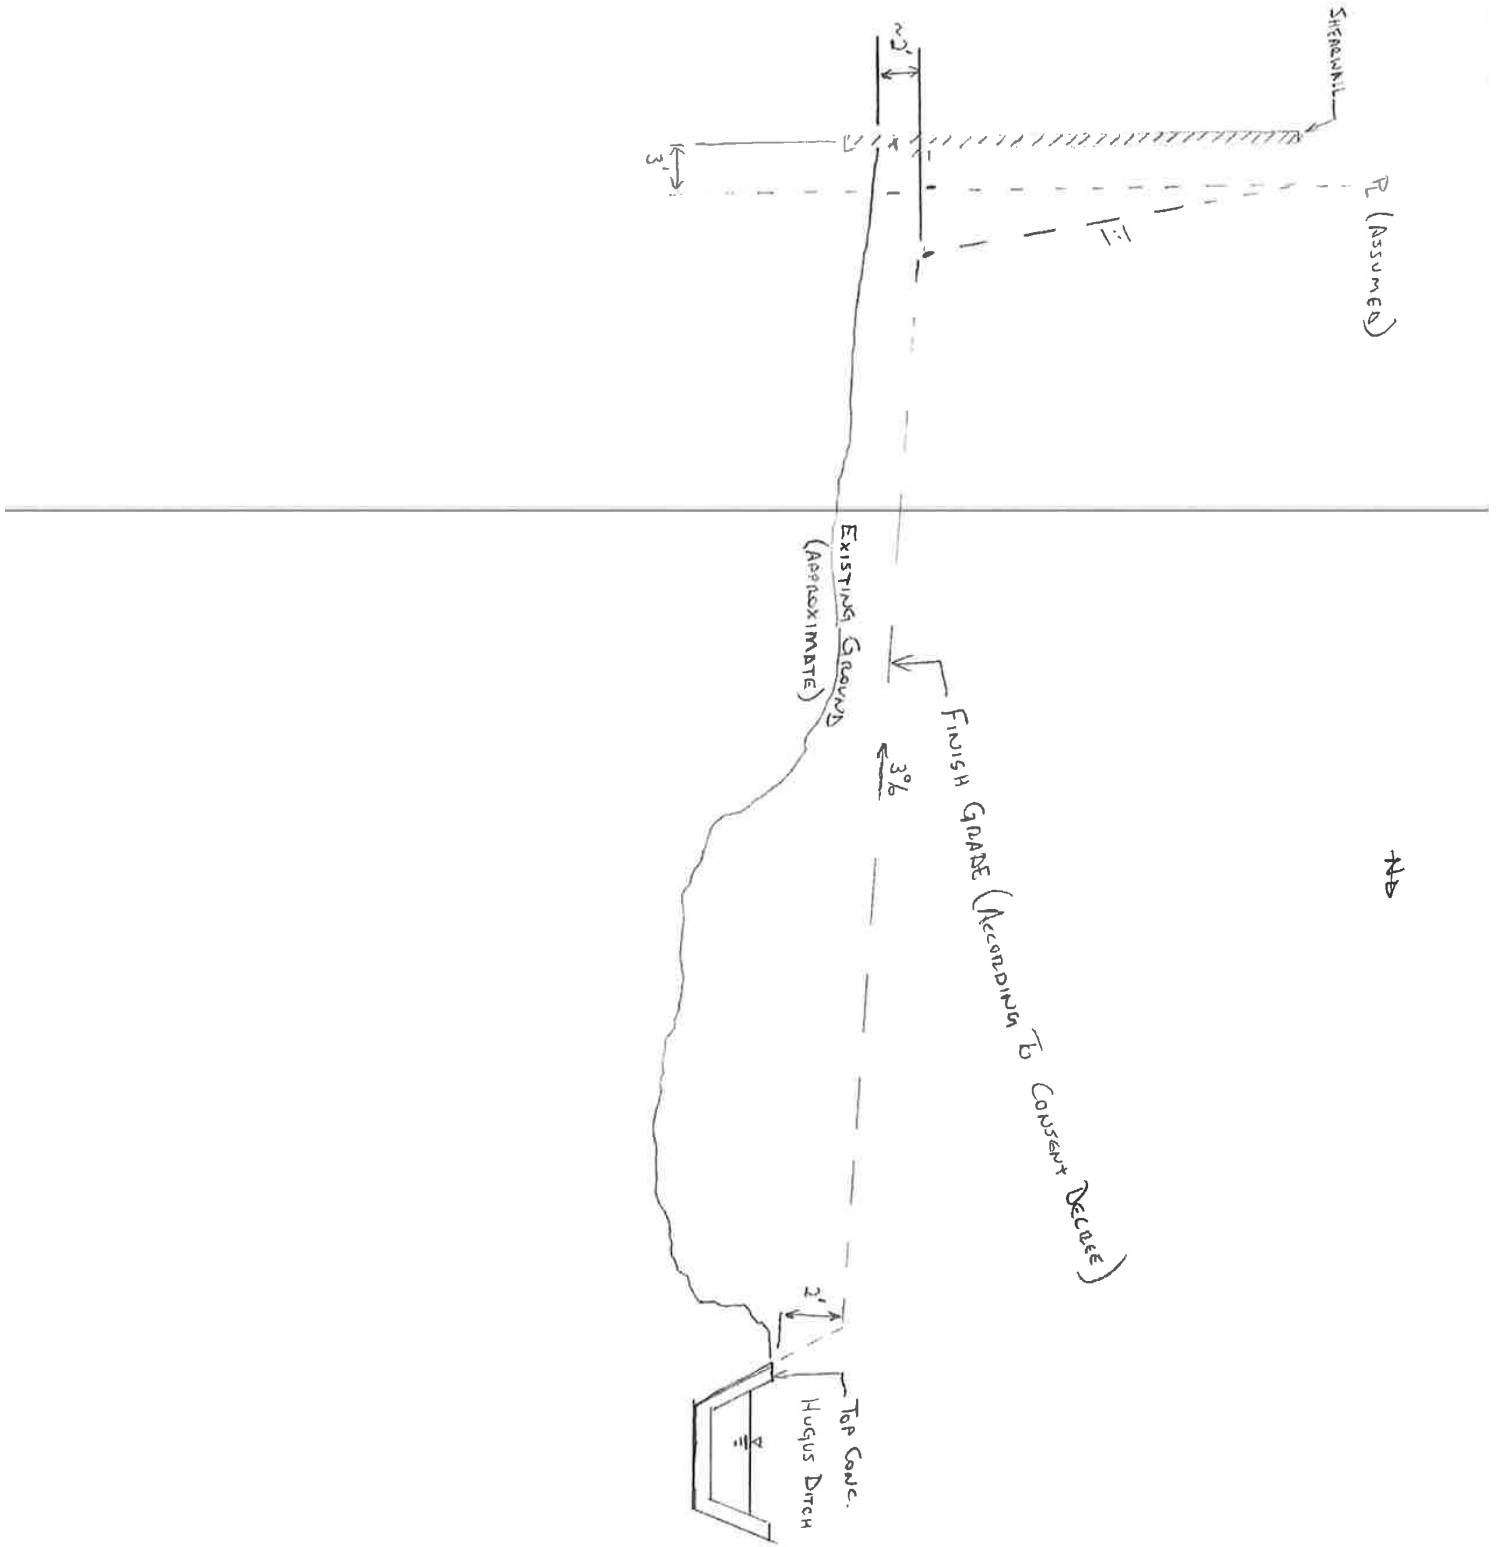

HB